



Data Sheet
TB-34 Series
**Bimetal Coil Thermometer -
Stainless Steel**

Distributed by



www.bristolinstruments.com

Bristol Instruments
90 Canal Street
4th Floor
Boston, MA 02114

Toll free 877-866-8500

Bimetal thermometer Stainless steel

**Dial size: ND of 2½, 4 and 6 in.
(63, 100 and 160 mm)
Accuracy: ±1% of full scale**

Features

Short response time
Wide selection of standard versions
High grade version




Applications

Mechanical engineering and apparatus manufacture,
Container and pipe construction
Building service and a wide range of applications in industry

Model and ND	TB-34 63	TB-34 100	TB-34 160
Connection	back centric		
Ranges in °C	-30...+50°C, -20...+60°C, -10...+50°C 0...60°C, 0...80°C, 0...100°C, 0...120°C, 0...160°C, 0...200°C, 0...250°C, 0...300°C 0...400°C, 0...500°C, other at inquiry		
Ranges in °F	0 ...150 °F, 0...200 °F, 0...250 °F, 0...300 °F -50...+130 °F, -40...+160, -30...+120 °F, -10...+100 °F, 20...240 °F, 30...140 °F 40...400 °F, 50...300 °F, 50...500 °F, 80...800 °F, 150...700 °F, other at inquiry		
Application	Full scale value		
Case	CrNi steel		
Bezel	CrNi steel , bayonet catch,		
Window	Glass lens		
Dial	Aluminium white ,scale black		
Pointer	Aluminium, black		
Measuring element	Bimetal coil		
Display correction	Adjusting pointer or at end of shaft		
Shaft	CrNi steel , 8 mm		
Connection	lock at data sheet T 190		
Length	45, 63, 100, 150, 200, 250 mm, max. 500 mm		
Protection	IP 43 or IP 65 according EN 60259 /IEC 529		
Weight	0,2 kg	0,4 kg	0,8 kg

Dimensions

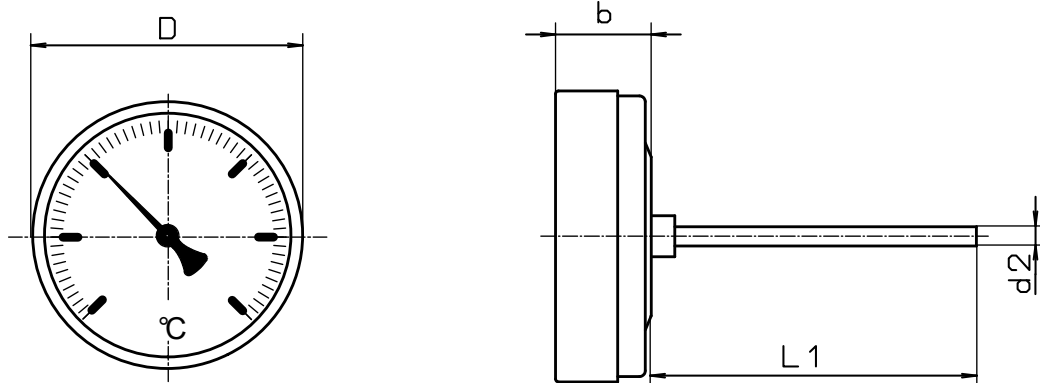

Dimensions in mm								
Model	NG	D	b		d2		sw	G
TB-34	63	63	20		8		21	G 1/2 B
TB-34	80	80	24		8		21	G 1/2 B
TB-34	100	100	28		8		21	G 1/2 B
TB-34	160	160	28		8		21	G 1/2 B

Model specification

