



Data Sheet  
**OMB 300UNI**


*Distributed by*



[www. BristolInstruments.com](http://www.BristolInstruments.com)

Bristol Instruments  
90 Canal Street, 4th Floor  
Boston, MA 02114

Toll free  
877-866-8500

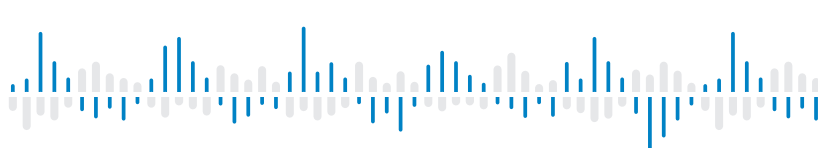

## OMB 300UNI



### UNIVERSAL BARGRAPH

- Three-color bargraph - 30 LED
- Multifunction input (PM, OHM, RTD, DU)
- Digital filters, Linearization
- Size of DIN 96 x 24 mm
- Power supply 10...30 VDC/24 VAC
- Option  
Comparators

The OMB 200/300/500UNI model series are simple bargraphs designed for maximum efficiency and user comfort while maintaining their favourable price.

Type OMB 300UNI is a multifunction instrument with the option of configuration

for 5 various input options, easily configurable in the instrument menu.

The instrument is based on a single-chip microcontroller with an A/D converter, which secures good accuracy, stability and easy operation of the instrument.

By selecting the insertion mode of the front plexiglass (reverse/face) you may choose the required scale printing for vertical or horizontal design of the instrument.

### OMB 300UNI

PROCESS MONITOR

OHMMETER

THERMOMETER FOR Pt/Ni

DISPLAY UNIT FOR LINEAR POTENTIOMETERS

### OPERATION

The instrument is set and controlled by five buttons located under the front panel. All programmable settings of the instrument may be performed in two adjusting modes.

**LIGHT MENU** contains solely items necessary for instrument setting.

**PROFI MENU** contains complete instrument setting, which is accessible only via OM Link.

Standard equipment is the OM Link interface, which together with the operation program enables modification and filing of all instrument settings as well as performing firmware updates (with OML cable).

All settings are stored in the EEPROM memory (settings hold even after the instrument is switched off).

### OPTION

**COMPARATORS** are assigned to monitor one, two or three limit values with relay output. The limit has adjustable hysteresis within full range of the display and selectable delay of the switch-on within the range of 0...99 s. Reaching the preset limits is signalled by LED and simultaneously by the switch-on of the relevant relay.

### STANDARD FUNCTIONS

#### PROGRAMMABLE PROJECTION

**Selection:** of input type and measuring range

**Setting:** manual, in menu optional projection on the display may be set for both limit values of the input signal

**Projection:** 30 LED

#### FUNCTIONS

**Linearization:** non-linear signals can be linearized by the means of a linearization table (up to 25 points)

#### DIGITAL FILTERS

**Exponential average:** from 2...100 measurements

**Rounding:** setting the projection step for display

#### EXTERNAL CONTROL

**Hold:** display/instrument blocking

**Lock:** control keys blocking

## TECHNICAL DATA

INPUT			
<b>Number of inputs</b>	1		
<b>PM Range</b>	optional in configuration menu		
	0...20 mA	< 1,2 V	Input 1
	4...20 mA	< 1,2 V	Input 1
	0...2 V	182 kΩ	Input 2
	0...5 V	182 kΩ	Input 2
	0...10 V	182 kΩ	Input 2
<b>OHM Range</b>	optional in configuration menu		
	0...100 kΩ		
<b>Connection</b>	2 wire		
<b>Pt Type</b>	optional in configuration menu		
	EU > 1 000 Ω, 3 850 ppm/°C		-50°...450°C
<b>Connection</b>	2 wire		
<b>Ni Type</b>	optional in configuration menu		
	Ni 1 000, 5 000 ppm/°C		-50°...250°C
<b>Connection</b>	2 wire		
<b>DU Pot. power supply</b>	2,5 VDC/6 mA, Potentiometer resistance > 500 Ω		
<b>External input</b>	1 input, on contact		
	The following functions can be assigned:		
	OFF	input off	
	HOLD	display stop	
	LOCK	control keys blocking	
	BLOC L3	activation of relay L3 is blocked (only in PM mode)	

### PROJECTION

Display: 30 LED  
 Bar color: red/green/orange  
 Brightness: adjustable - in menu

### INSTRUMENT ACCURACY

TC: 50 ppm/°C  
 Accuracy: ±1% of range + 1 digit  
 Rate: 0,5/5/50/max. measurement/s  
 Overload capacity: 2x; 10x (t < 30 ms)  
 Line compensation: max. 30 Ω (RTD)  
 Linearization: linear interpolation in 25 points (only via OM Link)  
 Digital filters: exponential average, rounding  
 OM Link: company communication interface for operation, setting and update of instruments  
 Watch-dog: reset after 25 ms  
 Calibration: at 25°C and 40 % r.h.

### COMPARATOR

Type: digital, menu adjustable, contact switch-on < 50 ms  
 Hysteresis mode: switching limit, hysteresis band (Lim and ±1/2 Hys.) and time (±99,9 s) determining the switching delay  
 Output: 1...3x bistable relays (250 VAC/30 VDC, 3 A)

### POWER SUPPLY

Range: 10...30 VDC/24 VAC, ±10 %, PF ≥ 0,4, I<sub>STB</sub> < 45 A/1,1 ms, isolated  
 Consumption: < 2,3 W/2,4 VA

### MECHANIC PROPERTIES


Material: Noryl GFN2 SE1, incombustible UL 94 V-I  
 Dimensions: 96 x 24 x 100 mm (w x h x d)  
 Panel cutout: 92 x 21,5 mm (w x h)

### OPERATING CONDITIONS

Connection: connector terminal blocks, section < 1,5/2,5 mm<sup>2</sup>  
 Stabilization period: within 5 minutes after switch-on  
 Working temperature: -20°...60°C  
 Storage temperature: -20°...85°C  
 Protection: IP40 (front panel only)  
 EL safety: EN 61010-1, A2  
 Dielectric strength: 2,5 kVAC per 1 min test between supply and input  
 Insulation resistance: for pollution degree II, measuring cat. III  
 power supply > 300 V (PI)  
 input, output > 300 V (PI), 150 V (DI)  
 EMC: EN 61326-1

PI - Primary insulation, DI - Double insulation

## CONNECTION

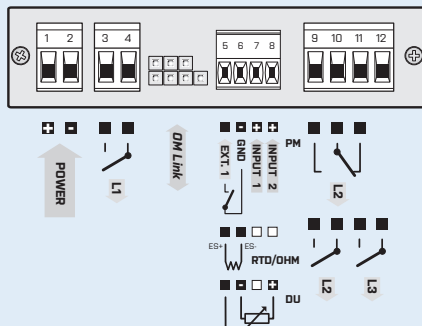

## ORDER CODE

### OMB 300UNI

-  -

Comparators	no	0
	1x relay (Form A)	1
	2x relays (Form A/Form C)	2
	3x relay (Form A)	3
<b>Specification</b>	<b>customized version, do not fill in</b>	<b>00</b>

Basic configuration of the instrument is indicated in bold.